

PART NR.
See dimensions table


COUNTRY OF ORIGIN
Italy

STANDARDS
REACH and RoHS compliant

- CHARACTERISTICS
- Suitable for larger cars and vans
 - Available with and without tin plating (TP)

BATTERY MASS STRIPS

PHOTO / TECHNICAL DRAWING

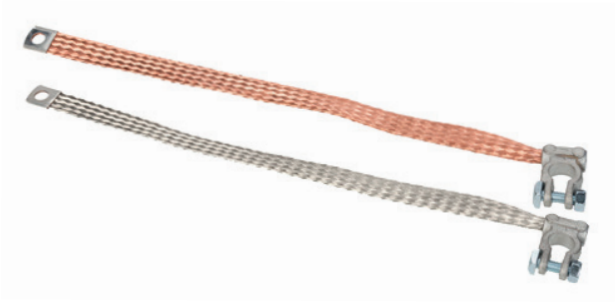

DIMENSIONS

Battery mass strips			
Part nr.	Description	Dimensions	Ø
MS20.180.212010	Copper braid with clamp	L 180 mm W 20mm²	M10
MS20.250.212010	Copper braid with clamp	L 250 mm W 20mm²	M10
MS20.300.212010	Copper braid with clamp	L 300 mm W 20mm²	M10
MS20.320.212010	Copper braid with clamp	L 320 mm W 20mm²	M10
MS20.350.212010	Copper braid with clamp	L 350 mm W 20mm²	M10
MS20.500.212010	Copper braid with clamp	L 500 mm W 20mm²	M10
MS25.200.21205	Copper braid with clamp	L 200 mm W 25mm²	M10
MS25.200.21205TP	Tin coated copper braid with clamp	L 200 mm W 25mm²	M10
MS25.250.21205	Copper braid with clamp	L 250 mm W 25mm²	M10
MS25.250.21205TP	Tin coated copper braid with clamp	L 250 mm W 25mm²	M10
MS25.300.21205	Copper braid with clamp	L 300 mm W 25mm²	M10
MS25.300.21205TP	Tin coated copper braid with clamp	L 300 mm W 25mm²	M10
MS25.350.21205	Copper braid with clamp	L 350 mm W 25mm²	M10
MS25.350.21205TP	Tin coated copper braid with clamp	L 350 mm W 25mm²	M10
MS25.400.21205	Copper braid with clamp	L 400 mm W 25mm²	M10
MS25.400.21205TP	Tin coated copper braid with clamp	L 400 mm W 25mm²	M10
MS25.500.21205	Copper braid with clamp	L 500 mm W 25mm²	M10
MS25.500.21205TP	Tin coated copper braid with clamp	L 500 mm W 25mm²	M10
MS25.600.21205	Copper braid with clamp	L 600 mm W 25mm²	M10
MS25.600.21205TP	Tin coated copper braid with clamp	L 600 mm W 25mm²	M10
MS50.500.212010	Copper braid with clamp	L 500 mm W 50mm²	M10
MS50.500.21205TP	Tin coated copper braid with clamp	L 500 mm W 50mm²	M5

TECHNICAL SPECIFICATIONS

Materials: Flexible braiding, Copper (Cu)
Max. Operational temp.: 80°C