

PART NR.
See parts table

COUNTRY OF ORIGIN:
Taiwan


STANDARDS:
REACH and RoHS compliant
Flammability: UL94 V-0
Protection: IP54 (with cover)

CHARACTERISTICS

- 2,0 mm² black or 3,3 mm² red cable, 135 mm each side
- CuZn fuse receptacles Sn plated
- Splash waterproof with cover (IP54)
- Self-extinguishing body and cover materials
- Used for mikrOTO II fuses complying to ISO 8820-12

mikrOTO II FUSE HOLDER - CABLE CONNECT

PHOTO / TECHNICAL DRAWING

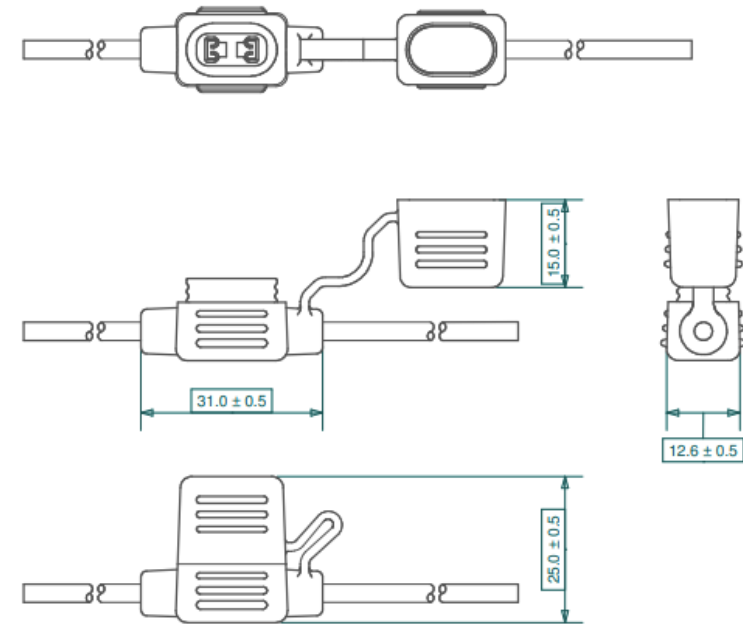

DIMENSIONS

L x W x H: 31 x 12,6 x 25 (incl. cover) mm

PARTS TABLE

Part nr.	Description
FH2325	Holder for BF2000 series (1 position) up to 20A, 2,0 mm ² black cable, 135 mm each side
FH2335	Holder for BF2000 series (1 position) up to 30A, 3,3 mm ² red cable, 135 mm each side

TECHNICAL SPECIFICATIONS

Body: PVC, black
Cover: PVC, black
Contacts: CuZn, Sn plated
Cable: 2,0 mm², black
3,3 mm², red
135 ± 10 mm each side