

**PART NR.**  
See parts table


**COUNTRY OF ORIGIN:**  
Taiwan

**STANDARDS:**  
REACH and RoHS compliant  
Flammability: UL94 V-0  
Protection: IP56 (with cover)


**CHARACTERISTICS**

- 1,5 mm<sup>2</sup> black or 2,5 mm<sup>2</sup> red cable, 135 mm each side
- Clear cover with integrated O-ring seal
- Phosphor bronze CuSn fuse receptacles
- Splash waterproof with cable seals, O-ring and clear cover (IP56)

**PHOTO / TECHNICAL DRAWING**

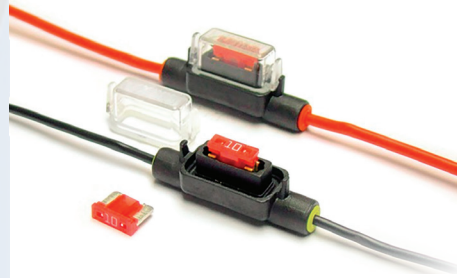

**miniOTO LOW PROFILE FUSE HOLDER - CABLE CONNECT**

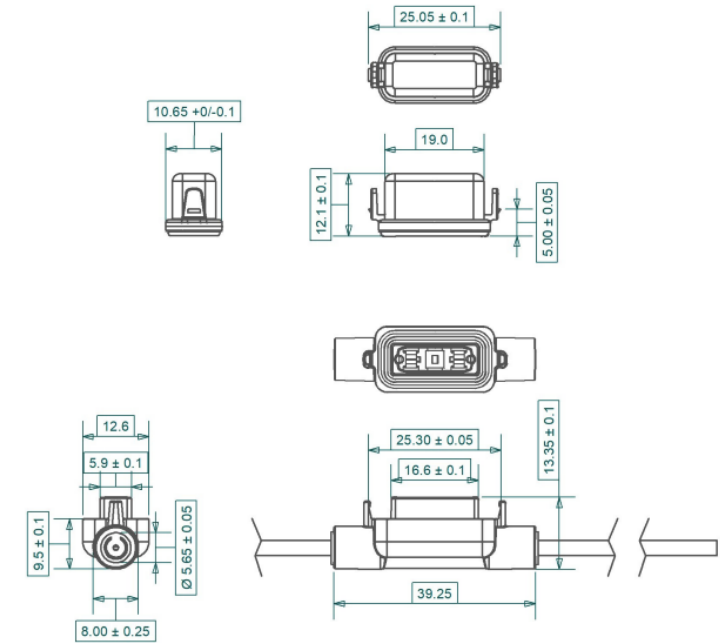

**DIMENSIONS**

L x W x H: 39,25 x 12,6 x 13,35 mm (body)  
25,05 x 10,65 x 12,1 mm (cover)

**PARTS TABLE**

Part nr.	Description
FHLP7325	Holder with cover for BFLP7000 series (1 position), 1,5 mm <sup>2</sup> black cable
FHLP7335*	Holder with cover for BFLP7000 series (1 position), 2,5 mm <sup>2</sup> red cable

\* Max. load 65% with > 120s duration applications

**TECHNICAL SPECIFICATIONS**

Body: PA6-GF30, black  
Cover: PC, clear  
With integrated O-ring seal  
Contacts: Phosphor bronze CuSn  
Cable: 1,5 mm<sup>2</sup>, black  
2,5 mm<sup>2</sup>, red  
135 ± 5 mm each side