

**PART NR.**  
See parts table

**COUNTRY OF ORIGIN:**  
Taiwan



**STANDARDS:**  
REACH and RoHS compliant  
Flammability: UL94 V-0

**CHARACTERISTICS**

- Easily add a protected circuit without splicing
- 1,3 mm<sup>2</sup> (AWG 16) red cable, 120 mm length, with blue butt connector
- CuZn fuse receptacles, Sn plated
- Sturdy body construction, PA66 UL94 V-0 material

**miniOTO LOW PROFILE CIRCUIT+ FUSE HOLDER - CABLE CONNECT**

**PHOTO / TECHNICAL DRAWING**

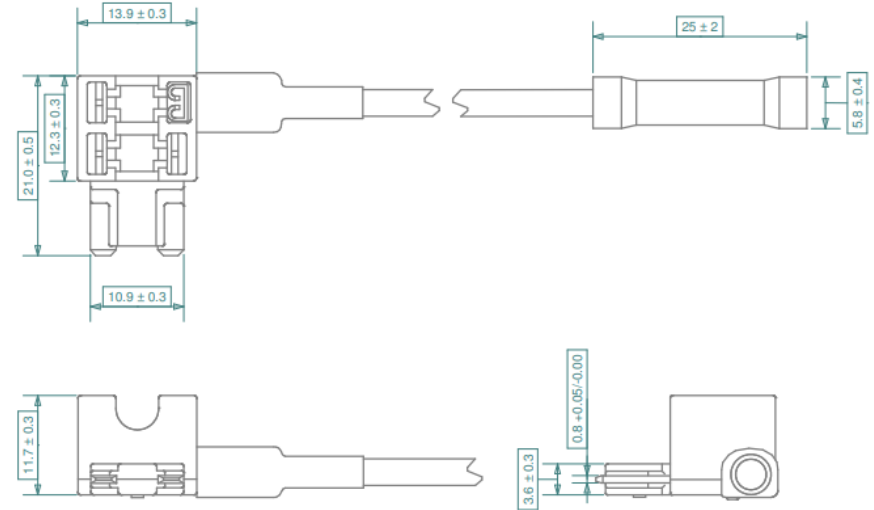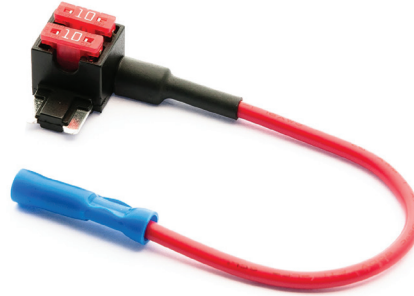

**DIMENSIONS**

L x W x H: 13,9 x 20 (+1) x 11,7 mm

**PARTS TABLE**

Part nr.	Description
FHLP7400	Circuit+ holder for BFLP7000 series (2 positions), 1,3 mm <sup>2</sup> red cable

**TECHNICAL SPECIFICATIONS**

Body: PA66, black  
Contacts: CuSn, Sn plated  
Connector: PVC butt connector, min. 5 kg pull-out force, blue  
Cable: 1,3 mm<sup>2</sup>, 110 ± 10 mm, red  
Current rating: Max. 10A for additional circuit