



PART NR.
See parts table

COUNTRY OF ORIGIN:
Italy

STANDARDS:
REACH and RoHS compliant



CHARACTERISTICS

- Sn plated fuse receptacles, reeled or loose
- Stackable, to create multi-position holder
- Clear cover optional
- Vertical insertion of fuse receptacles

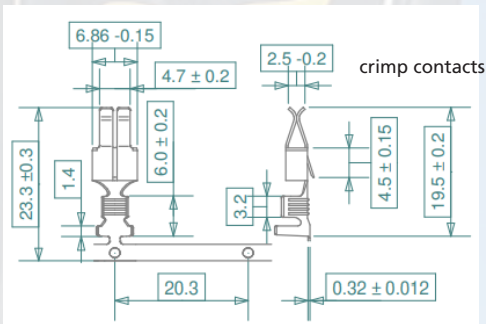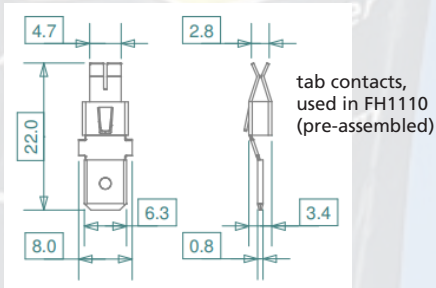

normOTO FUSE HOLDER - CRIMP CONNECT

PHOTO / TECHNICAL DRAWING

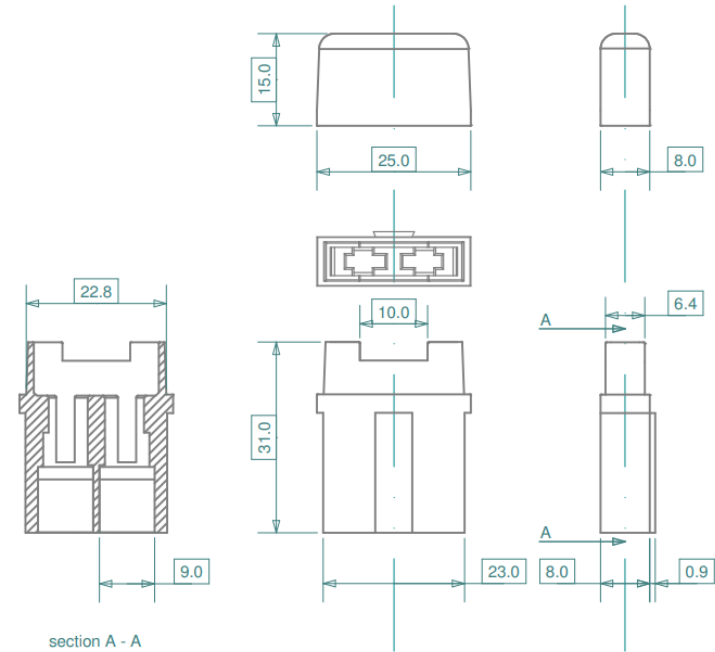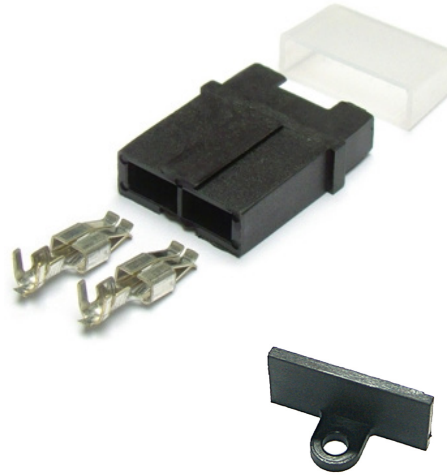

DIMENSIONS

L x W x H: 23 x 8 (+ 0,9) x 31 mm (body)
25 x 8 x 15 mm (cover)

PARTS TABLE

Part nr.	Description
FH1110	Holder with vertical tabs for SBF1500, SBF1800 and SBF1900 series up to 30A (1 position)
FH1105	Optional cover
FH1101	Separate body
CCX130FL	CuZn30, Sn plated crimp contact
FH1154L	Mounting bracket

TECHNICAL SPECIFICATIONS

Body: PA66-GF30, black
 Cover: PE, translucent
 Tab contacts: CuZn
 Crimp contacts: CuZn30, tin plated
 Bracket: PA6, black
 Wire range: 1,0~2,5 mm²
 Max. insulation Ø: 4,3 mm
 Wire strip length: 4,5 ± 0,5 mm