japOTO CARTRIDGE FUSE - ES SERIES

PART NR.
See rating table

COUNTRY OF ORIGIN
Japan

STANDARDS
REACH and RoHS compliant
ISO 8820-4
JASO D612

CHARACTERISTICS


- Meets international specs, complies to ISO 8820-4, JASO D612 and other standards
- Element visibility from top through transparent cover
- Robust/sturdy body construction
- Self extinguishing, color coded body materials
- High temperature resistive plastics used for fuse body materials
- Secure and controlled time-delayed functioning with purpose designed elements
- Integrated, endurable, Cu alloy receptacles
- Used in Japanese, European, American and Korean designed vehicles

PHOTO / TECHNICAL DRAWING







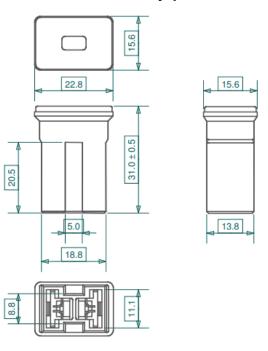

DIMENSIONS

LxWxH:

22,8 x 5,16 x 31 mm

RATING TABLE

Part nr.	Color	Rating (A)	Rating (V)
CBF050ES	red	50	32
CBF060ES	yellow	60	32
CBF080ES	black	80	32

TECHNICAL SPECIFICATIONS

Body:

PA66-GF20, color coded

Cover:

PC, clear

Receptacles:

Cu alloy with ceramic cooling element

www.ae-industries.nl