

**PART NR.**  
**DTM04-8P**



**COUNTRY OF ORIGIN**  
China

**STANDARDS**  
REACH and RoHS compliant  
Flammability: UL94 V-0  
Protection: IP68, IP6K9K

**CHARACTERISTICS**

- With grommet and wedge lock
- To be used with size 20 terminals, max. 7,5A

**PHOTO / TECHNICAL DRAWING**

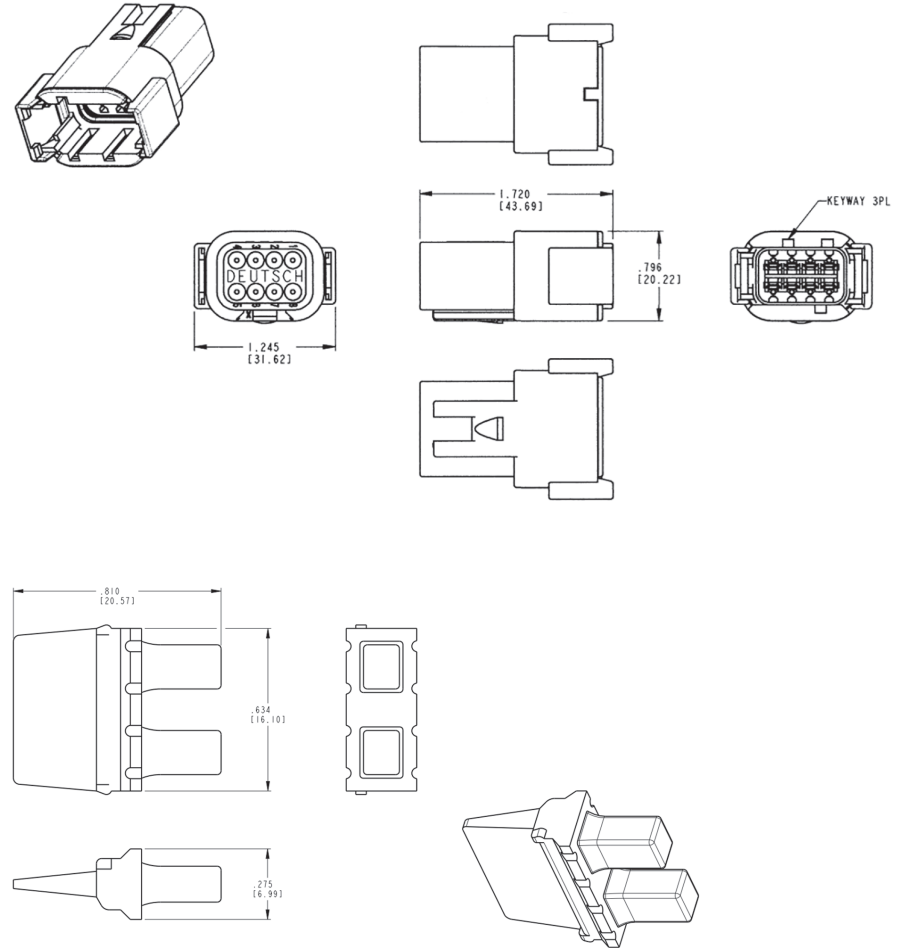

**DIMENSIONS**

L x W x H:

43,69 x 31,62 x 20,22 mm (housing)  
20,57 x 16,10 x 6,99 mm (wedge lock)

**TECHNICAL SPECIFICATIONS**

Housing:  
Grommet:  
Inner seal:  
Wedge lock:  
Temperature range:  
Max. current rating:

PA66 GF15, grey  
VMQ silicone, burnt red  
VMQ silicone, burnt red  
PBT, orange  
-55~125 °C  
7,5A