

PART NR.
DTP06-2S





COUNTRY OF ORIGIN
China

STANDARDS
REACH and RoHS compliant
Flammability: UL94 V-0
Protection: IP68, IP6K9K

CHARACTERISTICS

- With grommet and wedge lock
- To be used with size 12 terminals, max 25A

PHOTO / TECHNICAL DRAWING

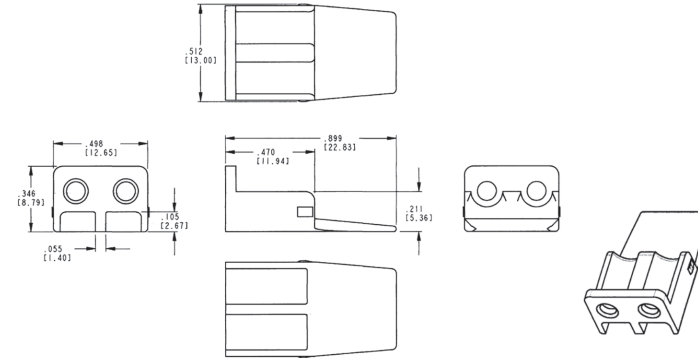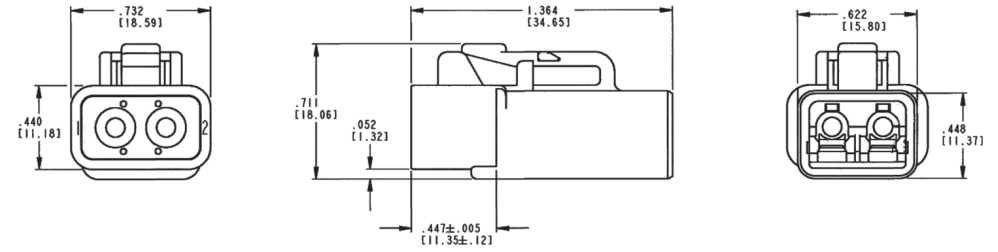

DIMENSIONS

L x W x H: 34,65 x 18,59 x 18,06 mm (housing)
22,83 x 13,00 x 8,79 mm (wedge lock)

TECHNICAL SPECIFICATIONS

Housing: PA66 GF15, grey
Grommet: VMQ silicone, burnt red
Wedge lock: PBT, orange
Temperature range: -55~125 °C
Max. current rating: 25A