


PART NR.
See dimensions table

COUNTRY OF ORIGIN
China

STANDARDS
REACH and RoHS compliant
UL listed (RBFV 2-12 only)

CHARACTERISTICS
• Conductor size according to DIN 46234

PHOTO / TECHNICAL DRAWING

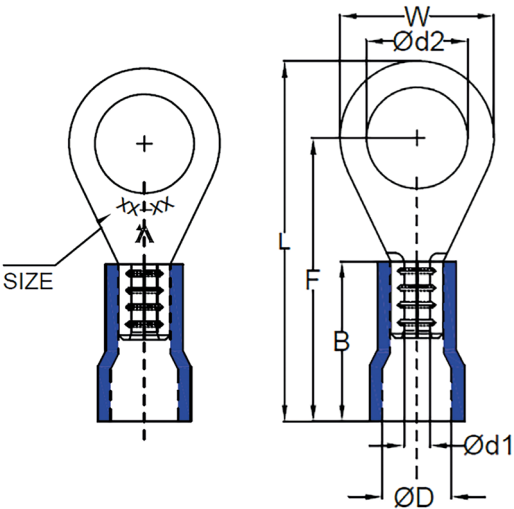

PVC RING TERMINAL - STANDARD

DIMENSIONS

Wire range	Part nr.	Ød2	W +0/-0,25	F ±0,5	L ±1,5	B ±1	ØD ±0,5	Ød1 ±0,25/-0	UL
22~16 AWG 0,5~1,5 mm²	RBFV 1.25-12	13,0 +0,25/-0	18,0	26,0	34,0	10,0	4,3	1,6	
16~14 AWG 1,5~2,5 mm²	RBFV 2-12	13,0 +0,22/-0	18,0	25,0	34,0	10,0	4,8	2,3	✓

TECHNICAL SPECIFICATIONS

Terminal:	Copper, tin plated
Insulation:	Vinyl (PVC)
Operating temperature:	-10~75 °C
Max. electrical current:	600V
Max. electrical rating:	red 19A blue 27A