


# LINE SPLICE CONNECTOR

**PART NR.**  
See dimensions table

**COUNTRY OF ORIGIN:**  
Taiwan

**STANDARDS:**  
REACH and RoHS compliant

## PHOTO / TECHNICAL DRAWING

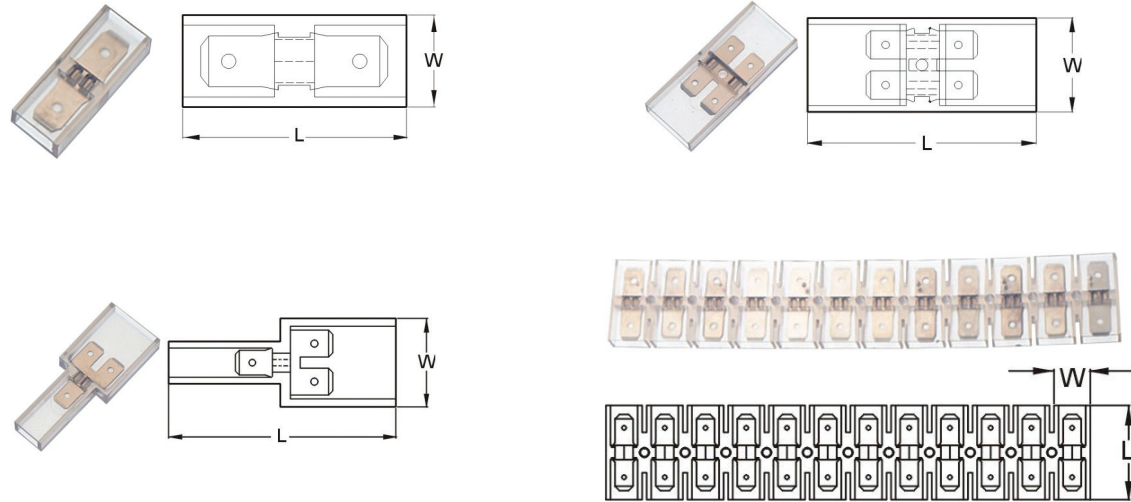

## DIMENSIONS

Part nr.	tab	W	Poles	L	UL
401/1	6,3	11,5	2	27,8	
405/3	6,3	21,0	3	54,0	
405/4	6,3	20,5	4	50,0	
401/12	6,3	11,8	12	25,8	

## TECHNICAL SPECIFICATIONS

Terminal:	Brass
Insulation:	Vinyl (PVC) for 2-, 3- and 4 pole items Polypropylene (PP) for 12 pole item
Color:	Clear
Max. temperature:	75 °C for 2-, 3-, and 4 pole items 105 °C for 12 pole item
Max. electrical current:	300V