

QUICK SPLICE CONNECTOR - T-TAP

PART NR.
See dimensions table



COUNTRY OF ORIGIN:
Taiwan

STANDARDS:
REACH and RoHS compliant

UL listed

REMARKS:
9991 counterpart for 281638
9995 counterpart for 285638
9993 counterpart for 289638

PHOTO / TECHNICAL DRAWING

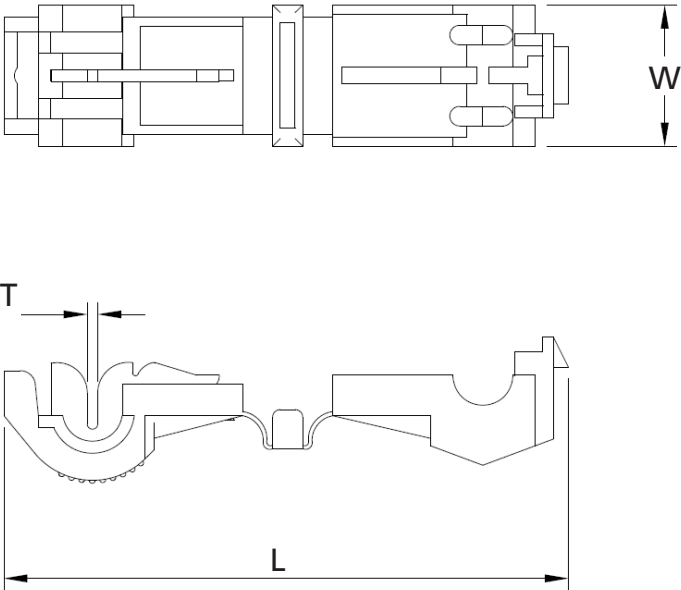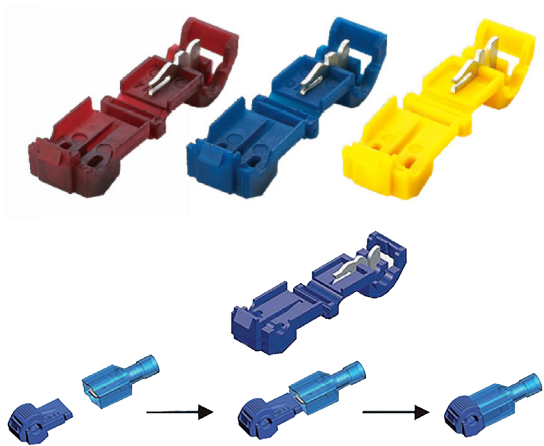

DIMENSIONS

Wire range	Part nr.		W	L	T	UL
22~18 AWG 0,5~1,0 mm ²	999-1		9,5	38,0	0,50	✓
18~14 AWG 1,0~2,5 mm ²	999-5		9,5	38,0	0,70	✓
12 AWG 4 mm ²	999-3		9,5	38,0	1,20	✓

TECHNICAL SPECIFICATIONS

Terminal:	Brass, tin plated
Insulation:	Nylon (PA)
Max. temperature:	105 °C
Max. electrical current:	300V
Max. electrical rating:	red 7A blue 15A yellow 20A