

## TERMINAL BLOCK

### PART NR.

See dimensions table

### COUNTRY OF ORIGIN:

China


### STANDARDS:

REACH and RoHS compliant  
Flame retardant to UL 94 Class V-2  
EN 60998-1  
EN 60988-2-1

### CHARACTERISTICS:

- Chemical resistance
- Pressure and impact resistant

### PHOTO / TECHNICAL DRAWING

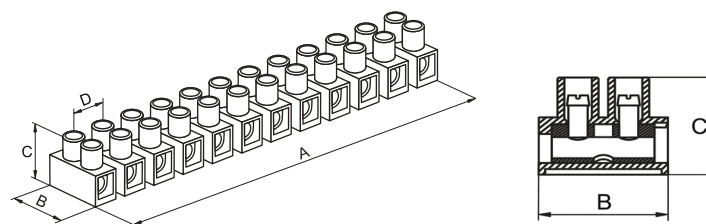

### DIMENSIONS

Part nr.	Wire range mm <sup>2</sup>	Color	Screw	A	B	C	D	Rating	Packed
KSPA-3WH	2,5~4,0	white	M2,5	92,0	15,8	12,8	7,7	3A / 450V	10
KSPA-3BL	2,5~4,0	black	M2,5	92,0	15,8	12,8	7,7	3A / 450V	10
KSPA-4WH	4,0~6,0	white	M3,0	111,0	17,4	13,3	9,3	6A / 450V	10
KSPA-4BL	4,0~6,0	black	M3,0	111,0	17,4	13,3	9,3	6A / 450V	10
KSPA-5WH	6,0~10,0	white	M3,0	128,0	19,7	14,5	10,7	10A / 450V	10
KSPA-5BL	6,0~10,0	black	M3,0	128,0	19,7	14,5	10,7	10A / 450V	10
KSPA-6WH	10,0~12,0	white	M3,5	133,0	22,6	18,0	11,1	15A / 450V	10
KSPA-6BL	10,0~12,0	black	M3,5	133,0	22,6	18,0	11,1	15A / 450V	10
KSPA-8WH	12,0~14,0	white	M4,0	137,0	22,6	18,5	11,4	20A / 450V	10
KSPA-8BL	12,0~14,0	black	M4,0	137,0	22,6	18,5	11,4	20A / 450V	10
KSPA-9WH	16,0	white	M4,0	163,0	23,6	20,5	13,6	30A / 450V	10
KSPA-9BL	16,0	black	M4,0	163,0	23,6	20,5	13,6	30A / 450V	10
KSPA-10WH	25,0	white	M4,0	192,0	30,2	25,0	16,0	60A / 450V	10
KSPA-10BL	25,0	black	M4,0	192,0	30,2	25,0	16,0	60A / 450V	10
KSPA-12WH	35,0	white	M5,0	204,0	36,7	28,3	17,0	80A / 450V	10
KSPA-12BL	35,0	black	M5,0	204,0	36,7	28,3	17,0	80A / 450V	10
KSPA-15WH	40,0	white	M6,0	232,0	39,0	33,0	19,3	100A / 450V	10
KSPA-15BL	40,0	black	M6,0	232,0	39,0	33,0	19,3	100A / 450V	10

### TECHNICAL SPECIFICATIONS

Terminal:	Brass
Insulation:	Nylon (PA)
Screws:	Steel, galvanized
Working temperature:	-35~120 °C
Max. electrical current:	See dimensions table
Max. electrical rating:	See dimensions table