


PART NR.
See dimensions table

COUNTRY OF ORIGIN:
Mexico

STANDARDS:
REACH and RoHS compliant
Waterproof

SOLDER BUTT CONNECTOR - ROHS COMPLIANT

PHOTO / TECHNICAL DRAWING

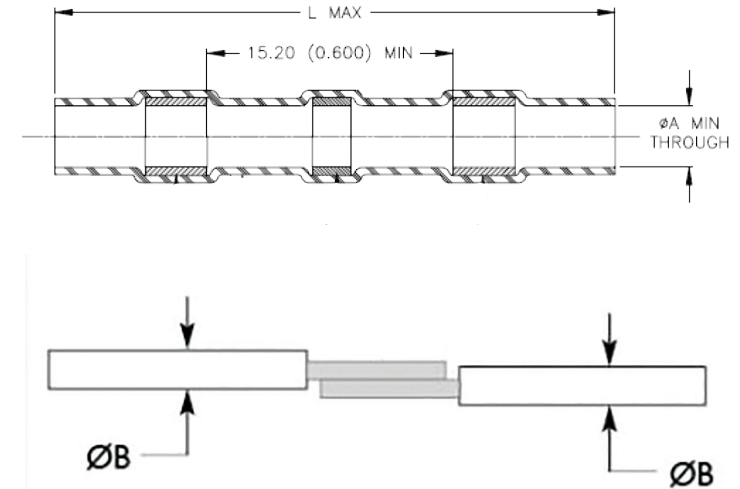

DIMENSIONS

Wire range	Part nr.	L	Ø A	Ø B min	Ø B max	UL
22~18 AWG 0,3~0,8 mm ²	ROHSWT-9001	26	1,7	0,4	1,7	✓
18~14 AWG 0,8~2,0 mm ²	ROHSWT-9002	42	2,7	1,3	2,7	✓
14~12 AWG 2,0~4,0 mm ²	ROHSWT-9003	42	4,5	1,8	4,5	✓
12~10 AWG 4~6 mm ²	ROHSWT-9004	42	6,0	2,8	6,0	✓

TECHNICAL SPECIFICATIONS

Insulation: Polyolefin, heat shrinkable, radiation cross-linked modified
 Solder preform: Sn42 Bi58 per ANSI / J-STD-006
 Flux: Flux ROM1 per ANSI / J-STD-004
 Operating temperature: -55~125 °C
 Min. shrink temperature: 140 °C