

**PART NR.**  
**DSQII2**


**COUNTRY OF ORIGIN**  
Taiwan

**STANDARDS**  
REACH and RoHS compliant

**CHARACTERISTICS**

- Lost-wax and precision casting
- Heat treatment finish
- Zinc phosphate surface treatment
- Fits quick interchangeable crimping tools MHQIBE, HJ43I and HJ56I

**PHOTO / TECHNICAL DRAWING**

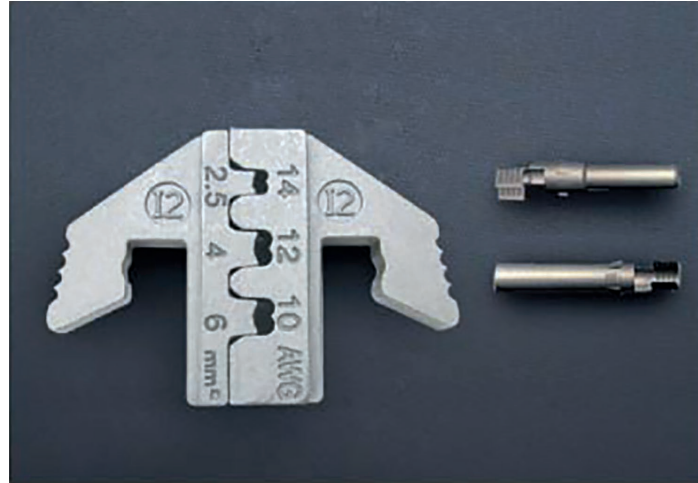

**DIMENSIONS**

L x W: 34 x 51 mm

**TECHNICAL SPECIFICATIONS**

Material: AISI-4140 alloy steel  
 For crimping: MC4 solar connectors  
 Capacity: AWG 14 / 2,5 mm<sup>2</sup>  
 AWG 12 / 4,0 mm<sup>2</sup>  
 AWG 10 / 6,0 mm<sup>2</sup>