

PART NR.
DSQIL10


COUNTRY OF ORIGIN
Taiwan

STANDARDS
REACH and RoHS compliant

CHARACTERISTICS

- Lost-wax and precision casting
- Heat treatment finish
- Zinc phosphate surface treatment
- Suitable for insulation-reduced stranded wires
- Fits quick interchangeable crimping tools MHQIBE, HJ43I and HJ56I

PHOTO / TECHNICAL DRAWING

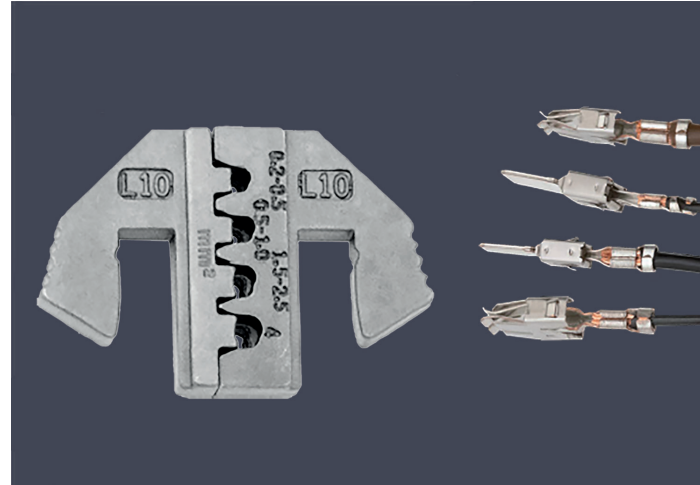

DIMENSIONS

L x W: 34 x 51 mm

TECHNICAL SPECIFICATIONS

Material: AISI-4140 alloy steel
 For crimping: Standard Power Timer and Multiple Contact Point terminals
 Capacity: AWG 24-20 / 0,2-0,5 mm²
 AWG 20-18 / 0,5-1,0 mm²
 AWG 16-14 / 1,5-2,5 mm²
 AWG 12 / 4,0 mm²