

PART NR.
DSQIL2


COUNTRY OF ORIGIN
Taiwan

STANDARDS
REACH and RoHS compliant

CHARACTERISTICS

- Lost-wax and precision casting
- Heat treatment finish
- Zinc phosphate surface treatment
- Suitable for insulation-reduced stranded wires
- Fits quick interchangeable crimping tools MHQIBE, HJ43I and HJ56I

PHOTO / TECHNICAL DRAWING

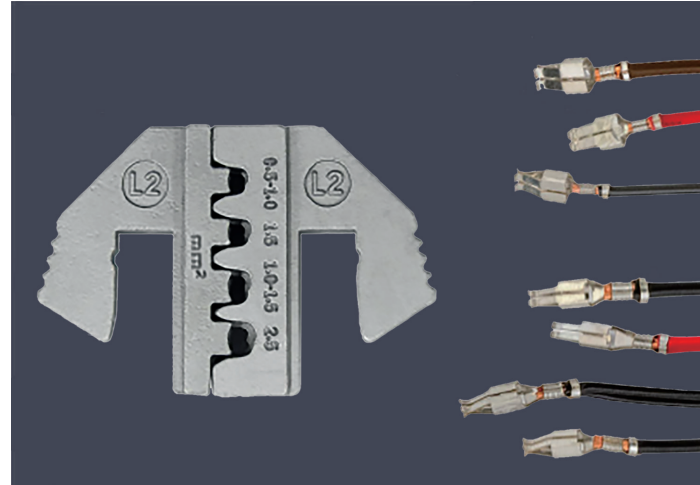

DIMENSIONS

L x W:

34 x 51 mm

TECHNICAL SPECIFICATIONS

Material:
For crimping:

AISI-4140 alloy steel
Female Junior Timer (0,12-2,5 mm²) and
Standard Timer (0,2-2,5 mm²) contacts

Capacity:

AWG 20-18 / 0,5-1,0 mm²
AWG 16 / 1,5 mm²
AWG 18-16 / 1,0-1,5 mm²
AWG 14 / 2,5 mm²