

## MULTI-CORE CABLE (FLRY-Y) - ROUND

### PART NR.

See dimensions table

### COUNTRY OF ORIGIN:

Poland

### STANDARDS:


REACH and RoHS compliant

DIN/ISO 6722

### CHARACTERISTICS:

- Low voltage automobile cable (FL) with reduced thickness of insulation (R) and PVC coating and insulation (YY)

### PHOTO / TECHNICAL DRAWING

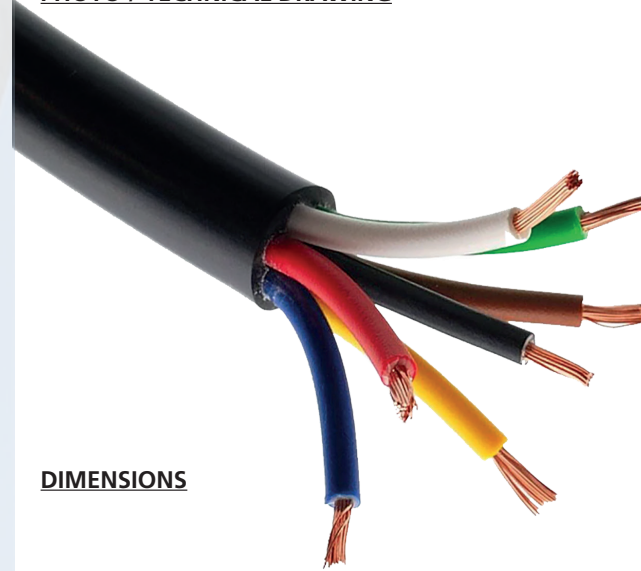

### DIMENSIONS

### TECHNICAL SPECIFICATIONS

Conductor:	Copper wire (Class 5)
Insulation:	PVC T2
Bending radius:	12 x D
Outer insulation:	Special PVC coating
Test voltage:	1000V
Rated voltage:	60V
Temperature rating:	-40 °C ~ 105 °C

Part nr.	Wire size mm <sup>2</sup>	Number of cores	Outer cable Ø (mm)	Mtrs/ reel
W7032050-100	0,50	2	4,5	100
W7032075-100	0,75	2	5,1	100
W7032100-100	1,00	2	5,5	100
W7032150-100	1,50	2	6,1	100
W7032250-100	2,50	2	7,3	100
W7033050-100	0,50	3	4,8	100
W7033075-100	0,75	3	5,4	100
W7033100-100	1,00	3	5,8	100
W7033150-100	1,50	3	6,5	100
W7033250-100	2,50	3	7,8	100
W7034050-100	0,50	4	5,2	100
W7034075-100	0,75	4	5,9	100
W7034100-100	1,00	4	6,4	100
W7034150-100	1,50	4	7,1	100
W7034250-100	2,50	4	8,6	100
W7035050-100	0,50	5	5,6	100
W7035075-100	0,75	5	6,4	100
W7035100-100	1,00	5	7,0	100
W7035150-100	1,50	5	7,8	100
W7035250-100	2,50	5	9,8	100
W7037050-100	0,50	7	6,1	100
W7037075-100	0,75	7	7,0	100
W7037100-100	1,00	7	8,0	100
W7037150-100	1,50	7	8,9	100
W7037250-100	2,50	7	10,7	100