

MULTI-CORE CABLE (FLRY-Y) - ROUND

PART NR.

See dimensions table

COUNTRY OF ORIGIN:

Poland


STANDARDS:

REACH and RoHS compliant
DIN/ISO 6722

CHARACTERISTICS:

- For usage in all kinds of trailers and semi-trailers.
- Low voltage automobile cable (FL) with reduced thickness of insulation (R) and PVC coating and insulation (YY)

PHOTO / TECHNICAL DRAWING

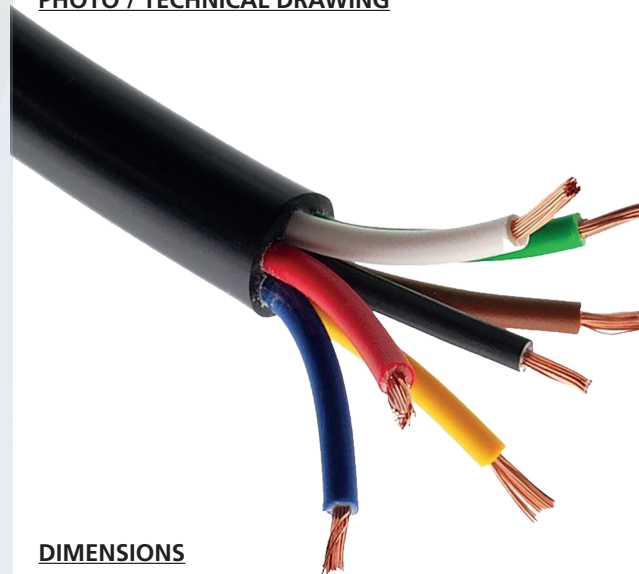

TECHNICAL SPECIFICATIONS

Conductor: Copper wire (Class 5)
 Insulation: PVC T2
 Bending radius: 12 x D
 Outer insulation: Special PVC coating
 Test voltage: 1000V
 Rated voltage: 60V
 Temperature rating: -40 °C ~ 105 °C

DIMENSIONS

Reel														
Part nr.	Wire size mm ²	Number of cores	Outer cable Ø (mm)	Color coating	Core color								Mtrs/reel	
					blue	yellow	black	red	white	green	brown	grey		
PER20075BG100RL*	0,75	2	5,1	black	B	G								100
PER20100ZR100RL*	1,00	2	5,5	black			Z	R						100
PER20150ZW50RL	1,50	2	6,1	black			Z		W					50
PER20250ZW50RL	2,50	2	7,3	black			Z		W					50
PER30100ZGRR100RL*	1,00	3	5,8	black			Z	R		GR				100
PER30150ZGRR100RL*	1,50	3	6,5	black			Z	R		GR				100
PER40075BRGRRW100RL*	0,75	4	5,9	black				R	W	GR	BR			100
PER40100BRGRRW50RL	1,00	4	6,4	black				R	W	GR	BR			50
PER40150BRGRRW50RL	1,50	4	7,1	black				R	W	GR	BR			50
PER50075BRGRSRWG100RL*	0,75	5	6,4	black		G		R	W		BR	GRS		100
PER50100BRGRSRWG50RL	1,00	5	7,0	black		G		R	W		BR	GRS		50
PER50150BRGRSRWG50RL	1,50	5	7,8	black		G		R	W		BR	GRS		50
PER70075ZBBRGRRWG100RL*	0,75	7	7,0	black	B	G	Z	R	W	GR	BR			100
PER70100ZBBRGRRWG50RL	1,00	7	8,0	black	B	G	Z	R	W	GR	BR			50
PER70150ZBBRGRRWG50RL	1,50	7	8,9	black	B	G	Z	R	W	GR	BR			50